




EXCELLENCE IN ROOFING

RENOLIT *WATERPROOFING*



Rely on it.

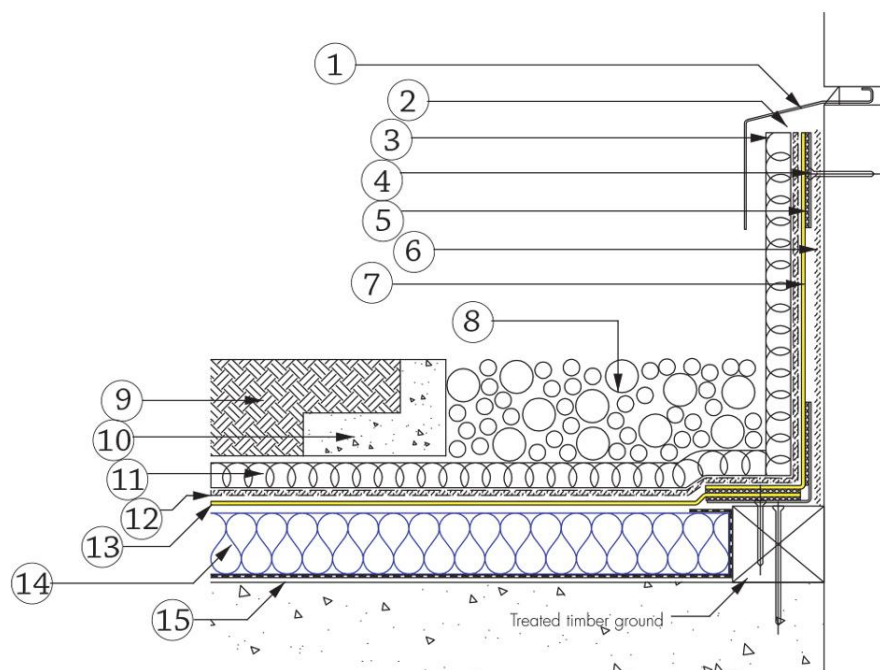

Note:
If wall construction is not insulated block, then insulation will be required to a minimum height of 300 mm.

Garden Roof with Gravel Margin

1. LEAD FLASHING TO BE LEAD PLUGGED TO HOLD FLASHING. PLUGS TO BE FIXED AT 300MM CENTRES. CHASE & FLASHING TO BE POINTED IN MASTIC SEALANT 'BY PLUMBER'
2. RENOLIT ALKORPLAN 35121 PROTECTION MEMBRANE
3. RENOLIT ALKORPLUS 81015 FILTER & DRAINAGE MAT
4. RENOLIT ALKORPLAN METAL TRIM
5. HEAT WELD
6. RENOLIT ALKORPLUS FLEECE PROTECTION LAYER
7. RENOLIT ALKORPLAN L 35177, NOT FLEECE BACKED
8. GRAVEL TO SPECIFICATION
9. SOIL 300-450 MM DEEP
10. SOIL RETENTION BARRIER
11. RENOLIT ALKORPLUS 81015 FILTER & DRAINAGE MAT
12. RENOLIT ALKORPLAN 35121 PROTECTION MEMBRANE
13. RENOLIT ALKORPLAN L 35177, NOT FLEECE BACKED
14. INSULATION
15. RENOLIT ALKORPLUS 81012 VAPOUR CONTROL LAYER