




# EXCELLENCE IN ROOFING

RENOLIT *WATERPROOFING*



*Rely on it.*

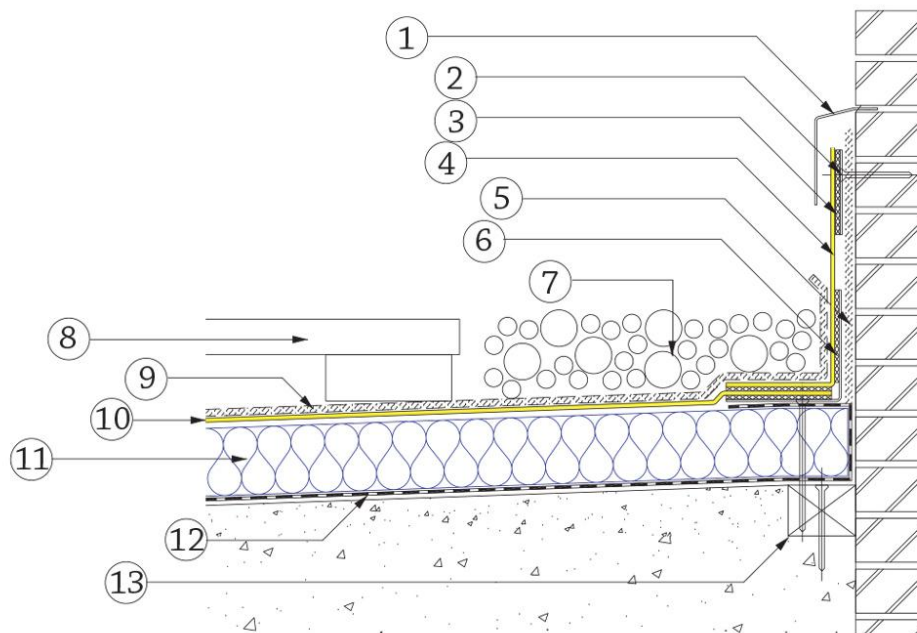

Note:  
If wall construction is not insulated block, then insulation will be required to a minimum height of 300 mm.

## Warm Roof Paved with Gravel Margin

1. LEAD FLASHING TO BE LEAD PLUGGED TO HOLD FLASHING. PLUGS TO BE FIXED AT 300MM CENTRES. CHASE & FLASHING TO BE POINTED IN MASTIC SEALANT 'BY PLUMBER'
2. RENOLIT ALKORPLAN METAL TRIM
3. HEAT WELD
4. RENOLIT ALKORPLAN F 35176/35276 MEMBRANE
5. RENOLIT ALKORPLUS FLEECE PROTECTION LAYER
6. RENOLIT ALKORPLAN METAL TRIM
7. GRAVEL TO SPECIFICATION
8. PAVING SLABS ON SUPPORT PADS
9. RENOLIT ALKORPLUS 35121 PROTECTION LAYER
10. RENOLIT ALKORPLAN L 35177, NOT FLEECE BACKED
11. INSULATION
12. RENOLIT ALKORPLUS 81012 VAPOUR CONTROL LAYER
13. TREADED TIMBER



**RENOLIT** waterproofing  
*Excellence in roofing*