




EXCELLENCE IN ROOFING

RENOLIT *WATERPROOFING*



Rely on it.

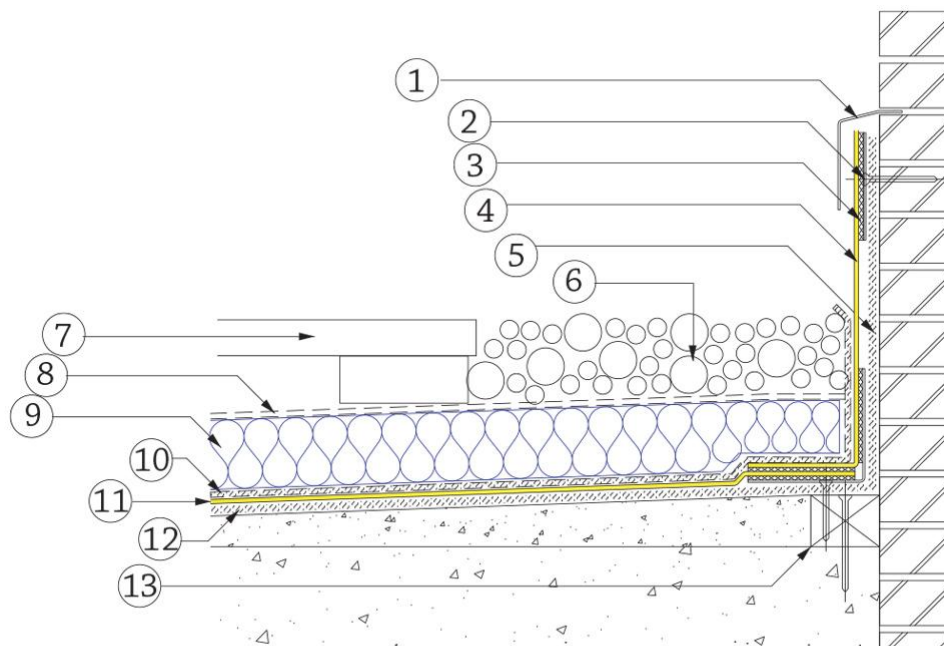

Note:

If wall construction is not insulated block, then insulation will be required to a minimum height of 300 mm.

Inverted Roof-Paved with Gravel Margin

1. LEAD FLASHING TO BE LEAD PLUGGED TO HOLD FLASHING. PLUGS TO BE FIXED AT 300MM CENTRES. CHASE & FLASHING TO BE POINTED IN MASTIC SEALANT 'BY PLUMBER'
2. RENOLIT ALKORPLAN METAL TRIM
3. HEAT WELD
4. RENOLIT ALKORPLAN F 35176/35276 MEMBRANE
5. RENOLIT ALKORPLUS FLEECE PROTECTION LAYER
6. GRAVEL TO SPECIFICATION
7. PAVING SLABS ON SUPPORT PADS
8. RENOLIT ALKORPLUS 81014 SLIP LAYER
9. INSULATION
10. RENOLIT ALKORPLAN 35121 PROTECTION MEMBRANE
11. RENOLIT ALKORPLAN L 35177, NOT FLEECE BACKED
12. RENOLIT ALKORPLUS FLEECE PROTECTION LAYER
13. TREADED TIMBER



RENOLIT waterproofing
Excellence in roofing