



Rely on it.

Accessories

Guide



EXCELLENCE
IN ROOFING

RENOLIT ALKORPLAN

Preformed corners	04	Stainless steel Sheet	12
Multi cable outlet	04	Walkway	13
Lightning Conductor Pad	05	Standing Seam profiles	14
Rainwater outlets and horizontal parapet outlets	06	RENOLIT ALKORSOLAR Mounting system	15
Seam sealer	09	RENOLIT ALKORSOLAR Accessories	16
Metal Sheet	10	Adhesives	17
Metal Sheet Roof Edge Profile	11		

RENOLIT ALKORTEC

Preformed Corners	20	RENOLIT ALKORSOLAR Mounting system	24
Rainwater outlets and balcony outlets	21	RENOLIT ALKORSOLAR Accessories	25
Seam Sealer	22	Adhesives	26
Metal Sheet	23	Primer	27

RENOLIT ALKORTOP

Preformed corners	29	Walkway	31
Multi cable outlet	29	Adhesives	32
Rainwater outlets and parapets	30	Solvents	38
Metal Sheet	31		

RENOLIT ALKORPLUS - GENERAL ACCESSORIES

Adhesives	34	RENOLIT POLIQUID liquid waterproofing	42
Accessories adhesives	36	RENOLIT ALKORSOLAR Accessories	44
Solvents	38	RENOLIT ALKORGREEN Accessories	46
Primer	38	General Accessories	47
Separation and protection layer	39		
Vapour control layers	41		



Discover our entire range of accessories at
WWW.RENOLIT.COM/ROOFING
 or order online.





RENOLIT ALKORPLAN
PVC accessories

For use with
RENOLIT ALKORPLAN roofing membranes -
ALKORDESIGN, ALKORBRIGHT and ALKORSMART

Preformed corners

Internal corners

Material	Plasticized PVC	
Angle	90°	
Installation	Hot air welding (480°C to 500°C)	
Packing unit	20 pces/box	
	Colour	ARTICLE
	White (90300)	81060-001
	Light grey (71004)	81060-003
	Charcoal (79851)	81060-010
	Lead grey (73321)	81060-014
	Copper green (60884)	81060-015
	Terracotta (82119)	81060-016
	Cool grey (77040)	81060-017
	Cool ivory (11014)	81060-018



External corners

Material	Plasticized PVC	
Angle	90°	
Installation	Hot air welding (480°C to 500°C)	
Packing unit	20 pces/box	
	Colour	ARTICLE
	White (90300)	81061-001
	Light grey (71004)	81061-003
	Charcoal (79851)	81061-010
	Lead grey (73321)	81061-014
	Copper green (60884)	81061-015
	Terracotta (82119)	81061-016
	Cool grey (77040)	81061-017
	Cool ivory (11014)	81061-018



Multi cable outlet

Multi cable outlet

Material	Plasticized PVC	
Height	120 mm	
Diameter	13-49 mm	
Installation	Hot air welding (480°C to 500°C)	
Packing unit	25 pces/box	
	Colour	ARTICLE
	Light grey	81088-043



Lightning Conductor Pad

Lightning Conductor Pad

Material	1,5 mm thick plasticized PVC
Dimensions	100 mm x 100 mm
Installation	Hot air welding (480 °C to 500 °C)
Application	To fix flat conductor rod up to 25 mm x 5 mm
Packing unit	50 pcs
	ARTICLE
	81107-002



Rainwater outlets and horizontal parapet outlets

Vertical water outlet & leaf guard (ø 80–200 mm)

Material	Plasticized PVC + PE grill	
Length	235 mm	
Installation	Hot air welding (480°C to 500°C)	
Packing unit	6 pces/box	
Diameter	Colour	ARTICLE
ø 80 mm	Light grey (71004)	81088-001
	Lead grey (73321)	81088-026
	Charcoal (79851)	81088-058
ø 100 mm	Light grey (71004)	81088-002
	Lead grey (73321)	81088-027
	Charcoal (79851)	81088-059
ø 125 mm	Light grey (71004)	81088-003
	Lead grey (73321)	81088-028
	Charcoal (79851)	81088-060



Vertical rainwater outlet

Material	Plasticized PVC	
Length	240 mm	
Diameter	110 mm	
Installation	Hot air welding (480°C to 500°C)	
Packing unit	25 pces/box	
	Colour	ARTICLE
	Light grey	81088-038



Universal downpipe leaf guard

Material	PE leaf guard	
Diameter	Universal (ø 80 mm - 125 mm)	
Packing unit	50 pces/box	
	Colour	ARTICLE
	Black	81088-039




Horizontal water outlet (rectangular)

Material	Plasticized PVC	
Angle	90°	
Installation length	425 mm	
Installation	Hot air welding (480°C to 500°C)	
Packing unit	5 pces/box	
Dimensions	Colour	ARTICLE
100 (W) x 65 mm (H)	Light grey	81088-040
100 (W) x 100 mm (H)	Light grey	81088-041



Parapet/Balcony outlet (rectangular)

Material	Plasticized PVC	
Angle	90°	
Installation length	345 mm	
Dimensions	a1: 84 mm (W) x 90 mm (H) a2: 48 mm (W) x 56 mm (H)	
Installation	Hot air welding (480°C to 500°C)	
Packing unit	10 pces/box	
	Colour	ARTICLE
	Light grey	81088-042

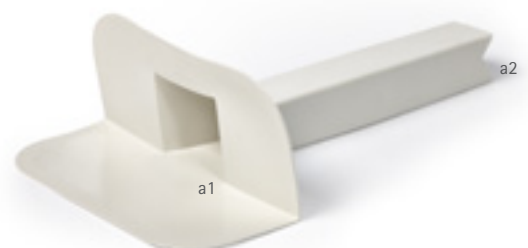

Rainwater outlets and horizontal parapet outlets


Rigid rainwater outlet with PVC flange

Material	Rigid PVC outlet + plasticized PVC flange			
Diameter wateroutlet	Ø 25 mm	Ø 75 mm	Ø 125 mm	Ø 225 mm
	Ø 32 mm	Ø 80 mm	Ø 140 mm	Ø 250 mm
	Ø 40 mm	Ø 90 mm	Ø 160 mm	Ø 280 mm
	Ø 50 mm	Ø 100 mm	Ø 180 mm	Ø 315 mm
	Ø 63 mm	Ø 110 mm	Ø 200 mm	
Outlet length	250 to 600 mm			
Colour outlet	Grey or black			
Colour flange	Light grey (71004)			
	Charcoal (79851)			
	Lead grey (73321)			
	Terracotta (82119)			
	Copper green (60884)			
	White (90300)			
	Silver (40100)			
	Copper (84040)			
	Installation	Hot air welding (480°C to 500°C)		
Packing unit	Per piece			
	ARTICLE UPON DEMAND			



Rigid horizontal parapet outlet with PVC flange


Material	Rigid PVC outlet + plasticized PVC flange	
Dimensions rectangular outlet	80 x 60 mm	125 x 125 mm
	100 x 60 mm	160 x 160 mm
	110 x 110 mm	
Outlet length	250 to 600 mm	
Angle	45° / 90°	
Colour outlet	Grey or black	
Colour flange	Light grey (71004)	
	Charcoal (79851)	
	Lead grey (73321)	
	Terracotta (82119)	
	Copper green (60884)	
	White (90300)	
	Silver (40100)	
	Copper (84040)	
	Installation	Hot air welding (480°C to 500°C)
Packing unit	Per piece	
	ARTICLE UPON DEMAND	

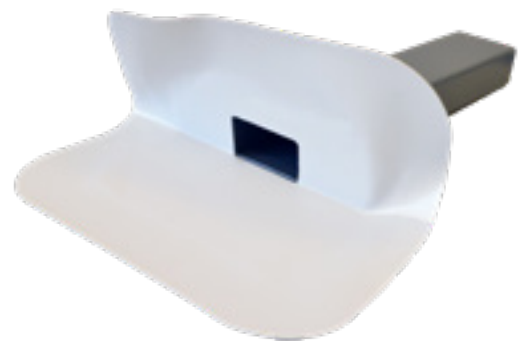

Rainwater outlets and horizontal parapet outlets

Flashing Plate

Material	Rigid PVC	
Installation	Connection piece between membrane and rigid PVC outlet	
Packing unit	25 pces/box	
Diameter		ARTICLE
ø 60 mm		81088-010
ø 75 mm		81088-012
ø 80 mm		81088-005
ø 100 mm		81088-006
ø 110 mm		81088-007
ø 125 mm		81088-008
ø 160 mm		81088-009
ø 200 mm		81088-014
ø 250 mm		81088-015

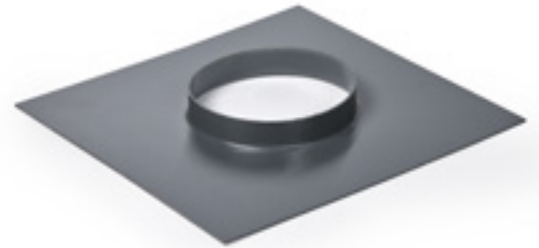

Vertical rainwater outlet and leaf guard

Material	Polyamide 6 outlet + PVC flange, PE leaf guard	
Length	220 mm	
Installation	Hot air welding (480°C to 500°C)	
Packing unit	Per piece	
Diameter	Colour	ARTICLE
ø 100 mm	Light grey (71004)	81088-066
ø 125 mm	Light grey (71004)	81088-067




Extension element for water outlet

Material	Polyamid 6 + plasticized PVC flange	
Length	350 mm	
Diameter	70-125 mm	
Installation	Hot air welding (480°C to 500°C)	
Packing unit	Per piece	
	Colour	ARTICLE
	Light grey (71004)	81088-057



Seam Sealer

PVC Seam sealer

Material	Liquid PVC	
Installation temp.	5°C (Flash point: -17°C)	
Shelf life	12 months	
Consumption	± 10 g/lm	
Application	Finishing of seams, T-welds and corners	
Transport	 UN 2056 Tetrahydrofuran, mixture MSDS available upon request or on www.renolit.com/roofing	
Packing unit		1 litre tin - 6 pces/box
	Colour	81038-030
	White (90300)	81038-004
	Light grey (71004)	81038-006
	Charcoal (79851)	81038-024
	Lead grey (73321)	81038-010
	Copper green (60884)	81038-011
	Terracotta (82119)	

Accessory for seam sealer

Can be applied with **RENOLIT ALKORPLUS** 81145 (bottle), 81245 (nozzle):
 See Chapter **RENOLIT ALKORPLUS**, page 48




Metal Sheet

Material	Galvanised metal sheet with an unreinforced RENOLIT ALKORPLAN membrane laminated to the surface. The metal face is treated with an anti-corrosion coating.
Composition	Metal plate thickness: 0.6 mm - Membrane thickness: 0.85 mm
Weight	5.8 kg/sqm
Application	Linear edge restraint, roof edge finish,...

Metal sheet 1 m x 2 m

Pces/pallet	Colour	ARTICLE
10 pces/pallet	Light grey (71004)	81170-003/0010
	Charcoal (79851)	81170-009/0010
	Lead grey (73321)	81170-011/0010
	Terracotta (82119)	81170-010/0010
	Copper green (60884)	81170-012/0010
	White (90300)	81179-704/0010
	Silver (40100)	81179-707/0010
	Copper (84040) (*)	81179-703/0010
	Cool grey (77040)	81179-705/0010
	Cool ivory (11014)	81179-706/0010
30 pces/pallet	Light grey (71004)	81170-003/0030
	Charcoal (79851)	81170-009/0030
	Lead grey (73321)	81170-011/0030

(*) Membrane thickness: 1.4 mm

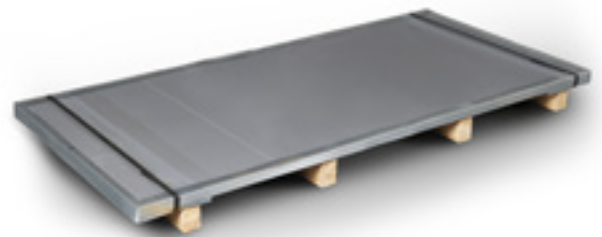

Metal sheet 1 m x 3 m

Pces/pallet	Colour	ARTICLE
10 pces/pallet	Lead grey (73321)	81171-006/0010
30 pces/pallet	Light grey (71004)	81171-003/0030
	Charcoal (79851)	81171-002/0030
	Lead grey (73321)	81171-006/0030

Metal sheet coil 1 m x 30 m

Pces/pallet	Colour	ARTICLE
4 pces/pallet	Light grey (71004)	81172-002
	Charcoal (79851)	81172-007

Metal sheet coil 1,25 m x 30 m


Pces/pallet	Colour	ARTICLE
4 pces/pallet	Light grey (71004)	81172-014



Metal Sheet Roof Edge Profile


Linear fixation profile

Material	Metal sheet profile for linear fixation	
Length	2 m	
Dimensions	10 x 40 x 10 mm	
Pces/pallet	Colour	ARTICLE
20 pces/pallet	Light grey (71004)	81170-004





Vertical connection profile

Material	Metal sheet profile for the connection to upstands	
Length	2 m	
Dimensions	10 x 10 x 40 x 10 mm	
Pces/pallet	Colour	ARTICLE
20 pces/pallet	Light grey (71004)	81170-005



L-shaped connection profile

Material	Metal sheet profile	
Length	2 m	
Dimensions	10 x 70 x 50 x 10 mm	
Pces/pallet	Colour	ARTICLE
20 pces/pallet	Light grey (71004)	81170-006

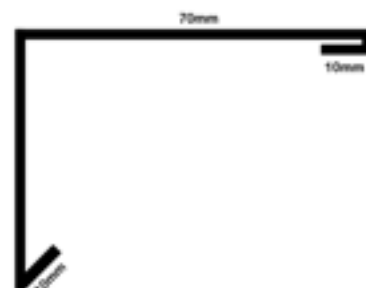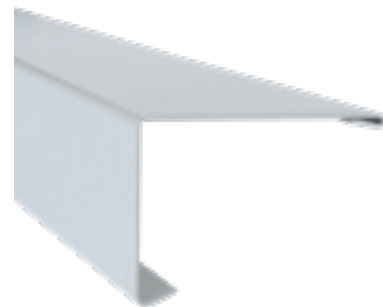

Stainless steel Sheet

Material	Stainless steel plate with an unreinforced RENOLIT ALKORPLAN membrane laminated to the surface.
Composition	Stainless steel plate thickness: 0.6 mm - Membrane thickness: 0.8 mm
Weight	5.8 kg/sqm
Application	Linear edge restraint, roof edge finish

Stainless steel Sheet 1 m x 2m


Pces/pallet	Colour	ARTICLE
10 pces/pallet	Light grey (71004)	81178-001/0010



Walkway

Walkway and protection layer

Material	Roofing membrane based on unreinforced PVC-P with a specific non-slip herringbone embossing, compatible with the RENOLIT ALKORPLAN membranes.		
Thickness	4 mm		
Width	76 cm		
Roll length	15 lm		
Weight	42 kg/roll		
Application	Walkway and protection membrane for delineating maintenance, access and emergency routes.		
	Colour		ARTICLE
	Zinc yellow (RAL 1018)		81114-002

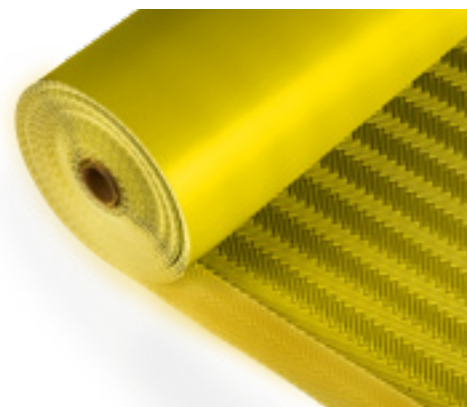

Demarcation strips


Material	Roofing membrane based on plasticized PVC.		
Thickness	1.2 mm		
Roll length	25 m		
Colour	Red (PL650)		
Application	Demarcation of specific zones on the roof		
Installation	Hot air welded on the roofing membrane		
Packing unit	Per roll		
	Width	Weight/roll	ARTICLE
	1.05 m	42.90 kg	35176-182
	0.15 m	6.15 kg	35176-190



Standing seam profiles

RENOLIT ALKORDESIGN profile Large

Material	Plasticized PVC	
Length	3 m	
Width (base)	35 mm	
Height	25 mm	
Installation	Hot air welding (480°C to 500°C)	
Application	Extruded profile as an imitation of standing seams	
Packing unit	40 pces/box	
	Colour	ARTICLE
	Light grey (71004)	81504-001
	Charcoal (79851)	81504-002
	Terracotta (82119)	81504-005
	Lead grey (73321)	81504-004
	Copper green (60884)	81504-003
	Silver (40100)	81504-701
	Copper (84040)	81504-009

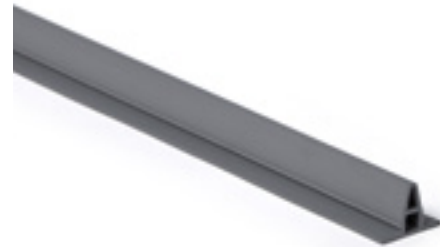

RENOLIT ALKORDESIGN profile X-Large

Material	Plasticized PVC	
Length	3 m	
Width (base)	70 mm	
Height	50 mm	
Installation	Hot air welding (480°C to 500°C)	
Application	Extruded profile as an imitation of standing seams	
Packing unit	10 pces/box	
	Colour	ARTICLE
	Light grey (71004)	81503-001
	Charcoal (79851)	81503-002
	Terracotta (82119)	81503-005
	Lead grey (73321)	81503-004
	Copper green (60884)	81503-003



RENOLIT ALKORSOLAR Mounting system

RENOLIT ALKORSOLAR accessories for mounting solar panels on PVC-P roofs or for alternative applications (wood or metal finish,...)

Flexible PVC profile

Material	Plasticized PVC
Length	3 m
Thickness	3 mm
Dimensions	80 mm (W) x 33 mm (H)
Packing unit	15 pces/box
	Colour
	Lead grey (73321)
	ARTICLE
	81600-002

Accessory for installing the RENOLIT ALKORSOLAR system

RENOLIT ALKORPLUS conversion kit 81078-010: *chapter RENOLIT ALKORPLUS, page 45*



Aluminium insert

Material	Aluminium EN AW 6060 T6
Length	3 m
Thickness	2 mm
Dimensions	20 mm (W) x 25 mm (H)
Packing unit	15 pces/box
	ARTICLE
	81601-004



RENOLIT ALKORSOLAR Accessories


Multifunctional mounting profile

Material	Aluminium EN AW 6063 T66
Length	6.20 m
Dimensions	46 mm (W) x 54 mm (H)
Packing unit	Per piece
	ARTICLE
	81631-005



Connecting piece for multifunctional profile

Material	Aluminium EN AW 6060 T66
Length	300 mm
Dimensions	28 mm (W) x 32 mm (H)
Application	Connecting piece for multifunctional profiles RENOLIT ALKORPLUS ₈₁₆₃₁
Packing unit	50 pcs/box
	ARTICLE
	81634-005



Clamp for multifunctional profile

Material	Aluminium EN AW 6060 T66
Length	50 mm x 30 mm x 5 mm
Application	Connecting piece for multifunctional profiles RENOLIT ALKORPLUS ₈₁₆₃₁
Packing unit	100 pcs
	ARTICLE
	81632-003




Self tapping screw

Material	Stainless steel A2 SW8
Length	25 mm
Diameter	6 mm
Packing unit	500 pcs/box
	ARTICLE
	81602-005



Adhesives

Detailing contact adhesive on synthetic rubber base


Material	Nitrile butadiene rubber (NBR)	
Installation	300 g/sqm (2 x 150 g/sqm) Apply with brush or with spray-on system	
Installation temp.	5°C (Flash point -17°C)	
Shelf life	12 months (+5 to +30°C.)	
Application	For double-sided bonding of fully adhered non-fleece backed membranes : roof upstands, detail finishing,...	
Transport		UN 1133 Adhesives
		MSDS available upon request or on www.renolit.com/roofing
Packing unit	Colour	ARTICLE
6 x 1 litre/box	Transparent	81040-004
10 litre drum	Transparent	81040-003



Accessory for Contact Adhesive

RENOLIT ALKORPLUS Adhesive Spray system 81063-001: *chapter RENOLIT ALKORPLUS, page 37*

Contact adhesive for roof surfaces on synthetic rubber base


Material	Styrene butadiene rubber (SBR)	
Installation	300 g/sqm (2 x 150 g/sqm) Apply with brush or with spray-on system	
Installation temp.	10°C (Flash point -26°C)	
Shelf life	12 months (+10 to +30°C.)	
Application	Bonding of fleece-backed membranes: roof surface, roof upstands	
Transport		UN 1133 Adhesives
		MSDS available upon request or on www.renolit.com/roofing
Packing unit	20 litre drum	
	Colour	ARTICLE
	Bluish	81064-001



Accessory for Contact Adhesive

RENOLIT ALKORPLUS Adhesive Spray system 81063-001 or 81063-003: *chapter RENOLIT ALKORPLUS, page 37*

Polyurethane (PUR) adhesive for roof surfaces

Material	Liquid polyurethane	
Installation	300 g/sqm	
Installation temp.	+5°C (Flash point -7°C)	
Shelf life	12 months (+10 to +25°C.)	
Application	Bonding of fleece-backed membranes: roof surface	
Transport		UN 1133 Adhesives
		MSDS available upon request or on www.renolit.com/roofing
Packing unit	6 litre drum	
	Colour	ARTICLE
	Yellow, transparent	81068-001




Accessory for polyurethane adhesive

RENOLIT ALKORPLUS Applicator trolley 81069: *chapter RENOLIT ALKORPLUS, page 37*

Adhesives

DUALFIX Adhesive for roofing membrane and insulation

Material	Polyurethane (PUR) foam	
Installation	125 g/sqm	
Installation temp.	+5 to +35°C	
Shelf life	18 months, store upright (+10 to +25°C)	
Application	Bonding of fleece-backed roofing membranes and insulation: roof surface	
Transport		UN 3500, Chemical under pressure
		MSDS available upon request or on www.renolit.com/roofing
Weight	13.4 kg (net weight: 10.4 kg)	
Packing unit	1 steel pressurized container	
	Colour	ARTICLE
	Blue	81065-200

Accessory for RENOLIT DUALFIX glue

RENOLIT ALKORPLUS Dualfix range: *chapter RENOLIT ALKORPLUS, page 36*





RENOLIT ALKORTEC
EVA/EBA accessories

For use with
RENOLIT ALKORTEC
roofing membranes

Preformed Corners

Internal corner

Material	Unreinforced EVA/EBA	
Angle	90°	
Installation	Hot air welding (480°C to 500°C)	
Packing unit	20 pces/box	
	Colour	ARTICLE
	Slate grey (79800)	81092-003
	White (91300)	81092-004



External corner

Material	Unreinforced EVA/EBA	
Angle	90°	
Installation	Hot air welding (480°C to 500°C)	
Packing unit	20 pces/box	
	Colour	ARTICLE
	Slate grey (79800)	81093-003
	White (91300)	81093-004



Rainwater outlets and balcony outlets

Vertical rainwater outlet and leaf guard

Material	Polyamide 6 outlet + EVA/EBA flange, PE leaf guard	
Length	220 mm	
Installation	Hot air welding (480°C to 500°C)	
Packing unit	Per piece	
Diameter	Colour	ARTICLE
ø 100 mm	Slate grey (79800)	81099-001
ø 125 mm	Slate grey (79800)	81099-002



Extension element for rainwater outlet

Material	Polyamide 6 outlet + EVA/EBA flange	
Length	350 mm	
Diameter	70 - 125 cm	
Installation	Hot air welding (480°C to 500°C), used in combination with rain water outlets 81099-001 and 002	
Packing unit	Per piece	
	Colour	ARTICLE
	Slate grey (79800)	81099-003



Vertical rainwater outlet for refurbishment

Material	Polyamide 6 outlet + EVA/EBA flange, PE leaf guard	
Length	420 mm	
Installation	Hot air welding (480°C to 500°C)	
Packing unit	2 pcs/box	
Diameter	Colour	ARTICLE
ø 80 mm	Slate grey (79800)	81099-004
ø 100 mm	Slate grey (79800)	81099-005




Balcony outlet (rectangular)

Material	Rigid PVC outlet + EVA/EBA flange	
Length	500 mm	
Dimensions	300 mm (W) x 100 mm (H)	
Installation	Hot air welding (480°C to 500°C)	
Packing unit	Per piece	
	Colour	ARTICLE
	Slate grey (79800)	81099-006



Seam Sealer

EVA/EBA Seam sealer

Material	Liquid EVA/EBA	
Installation temp.	5°C (Flash point: -17°C)	
Shelf life	12 months	
Consumption	±10 g/lm	
Application	Finishing of seams, T-welds and corners	
Transport	 UN 2056 Tetrahydrofuran, mixture MSDS available upon request or on www.renolit.com/roofing	
Packing unit		1 litre tin - 6 pces/box
	Colour	ARTICLE
	Slate grey (79800)	81036-003
	White (91300)	81036-004

Accessory for EVA/EBA Seam sealer

Can be applied with **RENOLIT ALKORPLUS** 81145 (bottle), 81245 (nozzle):
 chapter **RENOLIT ALKORPLUS**, page 48



Metal Sheet

Material	Galvanised metal sheet with an unreinforced RENOLIT ALKORTEC membrane laminated to the surface. The metal face is treated with an anti-corrosion coating.
Composition	Metal plate thickness: 0.6 mm Membrane thickness: 0.8 mm
Weight	5.8 kg/sqm
Application	Linear edge restraint, roof edge finish,...

Metal sheet 1 m x 2 m

Pces/pallet	Colour	ARTICLE
10 pces/pallet	Slate grey (79800)	81193-007/0010
30 pces/pallet	Slate grey (79800)	81193-007/0030
	White (91300)	81193-002/0030



Metal sheet coil 1 m x 30 m

Pces/pallet	Colour	ARTICLE
4 pces/pallet	Slate grey (79800)	81193-006




RENOLIT ALKORSOLAR Mounting system

RENOLIT ALKORSOLAR accessories for mounting solar panels on EVA/EBA roofs or for alternative applications (wood or metal finish,...)

Flexible profile compatible with EVA/EBA membranes

Length	3 m	
Thickness	3 mm	
Dimensions	80 mm (W) x 33 mm (H)	
Packing unit	15 pces/box	
	Colour	ARTICLE
	White (91100)	81590-003

Accessory for installing the RENOLIT ALKORSOLAR system
RENOLIT ALKORPLUS Conversion kit 81078: *chapter RENOLIT ALKORPLUS, page 45*

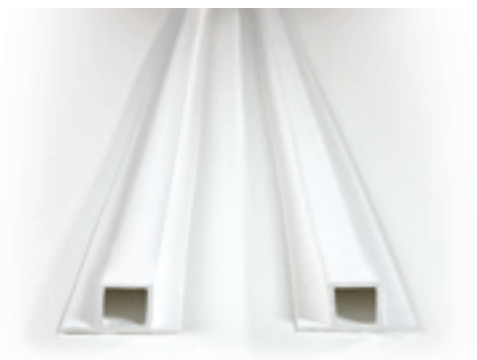

Aluminium insert

Material	Aluminium EN AW 6060 T6	
Length	3 m	
Thickness	2 mm	
Dimensions	20 mm (W) x 25 mm (H)	
Packing unit	15 pces/box	
		ARTICLE
		81601-004



RENOLIT ALKORSOLAR Accessories


Multifunctional mounting profile

Material	Aluminium EN AW 6063 T66
Length	6.20 m
Dimensions	46 mm (W) x 54 mm (H)
Packing unit	50 pces/box
	ARTICLE
	81631-005



Connecting piece for multifunctional profile

Material	Aluminium EN AW 6060 T66
Length	300 mm
Dimensions	28 mm (W) x 32 mm (H)
Application	Connecting piece for multifunctional profiles RENOLIT ALKORPLUS ₈₁₆₃₁
Packing unit	50 pces/box
	ARTICLE
	81634-005



Clamp for multifunctional profile

Material	Aluminium EN AW 6060 T66
Length	50 mm x 30 mm x 5 mm
Application	Connecting piece for multifunctional profiles RENOLIT ALKORPLUS ₈₁₆₃₁
Packing unit	100 pces
	ARTICLE
	81632-003




Self tapping screw

Material	Stainless steel A2 SW8
Length	25 mm
Diameter	6 mm
Packing unit	500 pces/box
	ARTICLE
	81602-005



Adhesives

Detailing contact adhesive on synthetic rubber base


Material	Nitrile butadiene rubber (NBR)	
Installation	300 g/sqm (2 x 150 g/sqm) Apply with brush or with spray-on system	
Installation temp.	5°C (Flash point -17°C)	
Shelf life	12 months (+5 to +30°C.)	
Application	For double-sided bonding of fully adhered non-fleece backed membranes : roof upstands, detail finishing,...	
Transport	 UN 1133 Adhesives MSDS available upon request or on www.renolit.com/roofing	
Packing unit		Colour
6 x 1 litre/box	Transparent	81040-004
10 litre drum	Transparent	81040-003



Accessory for Contact Adhesive

RENOLIT ALKORPLUS Adhesive Spray system 81063-001: *chapter RENOLIT ALKORPLUS, page 37*

Contact adhesive for roof surfaces on synthetic rubber base


Material	Styrene butadiene rubber (SBR)	
Installation	300 g/sqm (2 x 150 g/sqm) Apply with brush or with spray-on system	
Installation temp.	10°C (Flash point -26°C)	
Shelf life	12 months (+10 to +30°C.)	
Application	Bonding of fleece-backed membranes: roof surface, roof upstands	
Transport	 UN 1133 Adhesives MSDS available upon request or on www.renolit.com/roofing	
Packing unit		Colour
	Bluish	81064-001



Accessory for Contact Adhesive

RENOLIT ALKORPLUS Adhesive Spray system 81063-001 or 81063-003: *chapter RENOLIT ALKORPLUS, page 37*

Polyurethane (PUR) adhesive for roof surfaces

Material	Liquid polyurethane	
Installation	300 g/sqm	
Installation temp.	+5°C (Flash point -7°C)	
Shelf life	12 months (+10 to +25°C.)	
Application	Bonding of fleece-backed membranes: roof surface	
Transport	 UN 1133 Adhesives MSDS available upon request or on www.renolit.com/roofing	
Packing unit		Colour
	Yellow, transparent	81068-001




Accessory for polyurethane adhesive

RENOLIT ALKORPLUS Applicator trolley 81069: *chapter RENOLIT ALKORPLUS, page 37*

Adhesives

DUALFIX Adhesive for roofing membrane and insulation

Material	Polyurethane (PUR) foam	
Installation	125 g/sqm	
Installation temp.	+5 to +35°C	
Shelf life	18 months, store upright (+10 to +25°C)	
Application	Bonding of fleece-backed roofing membranes and insulation: roof surface	
Weight	13.4 kg (net weight: 10.4 kg)	
Transport	 UN 3500, Chemical under pressure MSDS available upon request or on www.renolit.com/roofing	
Packing unit		1 steel pressurized container
	Colour	ARTICLE
	Blue	81065-200

Accessory for RENOLIT DUALFIX glue

RENOLIT ALKORPLUS Dualfix range: *chapter RENOLIT ALKORPLUS, page 36*



Primer

Fast dry primer

Material	Bituminous primer	
Installation	100-300 ml/sqm, depending on the surface. (See technical data sheet for detailed specifications).	
Installation temp.	+3 to +27°C (Flash point +35°C)	
Shelf life	12 months (0 to +35°C)	
Product ranges	RENOLIT ALKORTEC SK	
Application	Pre-treatment of the roof surface before the installation of self-adhesive roofing membranes or the self-adhesive vapour control layer RENOLIT ALKORPLUS ₈₁₀₀₂	
Transport	UN 1268 Adhesives MSDS available upon request or on www.renolit.com/roofing	
Packing unit		25 litre drum – per piece
	Colour	ARTICLE
	Black	81141-002





RENOLIT ALKORTOP
TPO Accessories

*For use with
RENOLIT ALKORTOP
roofing membranes*

Preformed corners

Internal corners

Material	Unreinforced thermoplastic polyolefin (TPO)	
Angle	90°	
Installation	Hot air welding (380°C to 420°C)	
Packing unit	25 pces/box	
	Colour	ARTICLE
	Beige (91748)	81700-001



External corners

Material	Unreinforced thermoplastic polyolefin (TPO)	
Angle	90°	
Installation	Hot air welding (380°C to 420°C)	
Packing unit	25 pces/box	
	Colour	ARTICLE
	Beige (91748)	81700-002



Multi cable outlet

Cable outlet

Material	Unreinforced polypropylene	
Height	20 cm	
Diameter	10-20 mm	
Installation	Hot air welding (380°C to 420°C)	
Packing unit	Per piece	
	Colour	ARTICLE
	Beige (91748)	81701-001



Rainwater outlets and parapets

Vertical rainwater outlet for refurbishment & leaf guard

Material	Polypropylene outlet + PE leaf guard	
Length	33 cm	
Installation	Hot air welding (380°C to 420°C)	
Packing unit	Per piece	
Diameter	Colour	ARTICLE
ø 75 mm	Beige (91748)	81701-002
ø 90 mm	Beige (91748)	81701-003
ø 110 mm	Beige (91748)	81701-004
ø 125 mm	Beige (91748)	81701-005



Horizontal rainwater outlet

Material	Polypropylene	
Length	48 cm	
Installation	Hot air welding (380°C to 420°C)	
Packing unit	Per piece	
Diameter	Colour	ARTICLE
ø 75 mm	Beige (91748)	81701-006
ø 110 mm	Beige (91748)	81701-007




Balcony outlet

Material	Polypropylene	
Length	49 cm	
Dimensions	100 (H) x 300 (W) mm	
Installation	Hot air welding (380°C to 420°C)	
Packing unit	Per piece	
	Colour	ARTICLE
	Beige (91748)	81701-008



Metal Sheet

Material	Galvanised metal sheet with an unreinforced RENOLIT ALKORTOP membrane laminated to the surface. The metal face is treated with an anti-corrosion coating.
Composition	Metal plate thickness: 0.6 mm Membrane thickness: 0.8 mm
Weight	5.8 kg/sqm
Installation	Linear edge restraint, roof edge finish,...

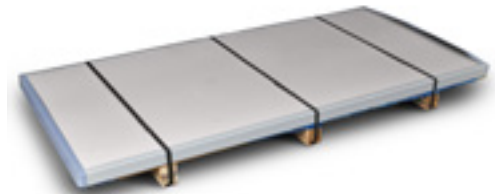


Metal sheet 1 m x 2 m

Pces/pallet	Colour	ARTICLE
30 pces/pallet	Beige (91748)	81700-003

Walkway


Walkway and protection layer

Material	Roofing membrane based on unreinforced TPO with a specific non-slip herringbone embossing, compatible with the RENOLIT ALKORTOP membranes. Yellow safety edge borders.	
Thickness	4 mm	
Width	76 cm	
Roll length	15 lm	
Weight	42 kg/roll	
Application	Walkway and protection membrane for delineating maintenance, access and emergency routes.	
	Colour	ARTICLE
	Grey (RAL 7040)	81115-001

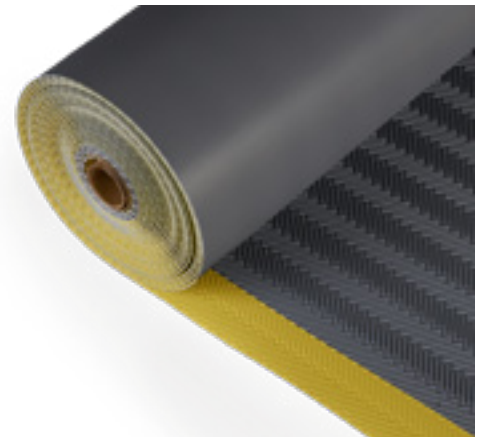

Adhesives


Detailing contact adhesive

Material	Based on synthetic rubber dissolved in organic solvent	
Installation	300 g/sqm	
Installation temp.	15 to 25°C (Flash point: -26°C)	
Shelf life	12 months (+10 to +20°C)	
Application	For double-sided bonding of fully adhered non-fleece backed membranes : roof upstands, detail finishing,...	
Transport	 UN 1133, Adhesives containing flammable liquid MSDS available upon request or on www.renolit.com/roofing	
Packing unit		10 litre drum
	Colour	ARTICLE
	Yellow	81701-010



Solvents

Cleaner

Material	Butanone	
Installation temp.	5°C (Flash point: -2°C)	
Shelf life	12 months (10 to 30°C)	
Application	Cleaning of the welding area, removal of stains (bituminous products, adhesive residue,...)	
Transport	 UN 1993, Flammable liquid, N.O.S. MSDS available upon request or on www.renolit.com/roofing	
Packing unit		5 litre drum
	Colour	ARTICLE
	Transparent	81701-009






RENOLIT ALKORPLUS
General accessories

For use with
RENOLIT ALKORPLAN, ALKORTEC and ALKORTOP roofing membranes and for
ALKORDESIGN, ALKORBRIGHT, ALKORGREEN, ALKORSOLAR and ALKORSMART

Adhesives

Detailing contact adhesive on synthetic rubber base


Material	Nitrile butadiene rubber (NBR)	
Installation	300 g/sqm (2 x 150 g/sqm) Apply with brush or with spray-on system	
Installation temp.	5°C (Flash point -17°C)	
Shelf life	12 months (+5 to +30°C.)	
Product ranges	RENOLIT ALKORPLAN, ALKORTEC	
Application	For double-sided bonding of fully adhered non-fleece backed membranes : roof upstands, detail finishing,...	
Transport		UN 1133 Adhesives
		MSDS available upon request or on www.renolit.com/roofing
Packing unit	Colour	ARTICLE
6 x 1 litre/box	Transparent	81040-004
10 litre drum	Transparent	81040-003

Accessory for Contact Adhesive

RENOLIT ALKORPLUS Adhesive Spray system 81063-001: *chapter RENOLIT ALKORPLUS, page 37*



Contact adhesive for roof surfaces on synthetic rubber base


Material	Styrene butadiene rubber (SBR)	
Installation	300 g/sqm (2 x 150 g/sqm) Apply with brush or with spray-on system	
Installation temp.	10°C (Flash point - 26°C)	
Shelf life	12 months (+10 to +30°C.)	
Product ranges	RENOLIT ALKORPLAN, ALKORTEC	
Application	Bonding of fleece-backed membranes: roof surface, roof upstands	
Transport		UN 1133 Adhesives
		MSDS available upon request or on www.renolit.com/roofing
Packing unit	20 litre drum	
	Colour	ARTICLE
	Bluish	81064-001

Accessory for contact adhesive

RENOLIT ALKORPLUS Adhesive Spray system 81063-001 or 81063-003: *chapter RENOLIT ALKORPLUS, page 37*



Polyurethane (PUR) adhesive for roof surfaces

Material	Liquid polyurethane	
Installation	300 g/sqm	
Installation temp.	+5°C (Flash point ≤ 7°C)	
Shelf life	12 months (+10 to +25°C.)	
Product ranges	RENOLIT ALKORPLAN, ALKORTEC	
Application	Bonding of fleece-backed membranes: roof surface	
Transport		UN 1133 Adhesives
		MSDS available upon request or on www.renolit.com/roofing
Packing unit	6 litre drum	
	Colour	ARTICLE
	Yellow, transparent	81068-001

Accessory for polyurethane adhesive

RENOLIT ALKORPLUS Applicator trolley 81069: *chapter RENOLIT ALKORPLUS, page 37*



Adhesives

DUALFIX Adhesive for roofing membrane and insulation

Material	Polyurethane (PUR) foam
Installation	125 g/sqm
Installation temp.	+5 to +35°C
Shelf life	18 months, store upright (+10 to +25°C)
Product ranges	RENOLIT ALKORPLAN, ALKORTEC
Application	Bonding of fleece-backed roofing membranes and insulation: roof surface
Weight	13.4 kg (netto: 10.4 kg)
Transport	UN 3500, Chemical under pressure MSDS available upon request or on www.renolit.com/roofing
Packing unit	1 steel pressurized container
	Colour ARTICLE
	Blue 81065-200



Accessories adhesives

Dispensing kit for DUALFIX adhesive 81065

Material	Spray gun, dispensing hose + cable connector + 25 spray nozzles
Product ranges	RENOLIT ALKORPLAN, ALKORTEC
Application	The dispensing kit makes it possible to atomize the glue onto the roof surface
	ARTICLE
	Accessories dispensing kit 81065-201
	Bag with 25 extra spray nozzles 81065-202



Dispensing kit for DUALFIX adhesive 81065

Material	Spray nozzle + dispensing hose and cable connector
Product ranges	RENOLIT ALKORPLAN, ALKORTEC
Application	The nozzle makes it possible to dispense the glue with caterpillar-shaped beading on the insulation
Packing unit	10 kits/box
	ARTICLE
	81065-203



Cleaning connection for DUALFIX adhesive 81065

Material	Cleaner connection element
Product ranges	RENOLIT ALKORPLAN, ALKORTEC
Application	To clean the spray installation
Packing unit	Per piece
	ARTICLE
	81065-204



PU-cleaner for DUALFIX adhesive 81065

Material	Propane-2-ol ; isopropylalcohol, acetone
Product ranges	RENOLIT ALKORPLAN, ALKORTEC
Application	Dissolves and removes uncured polyurethane foam
Transport	UN 1950, Aerosols, flammable
	MSDS available upon request or on www.renolit.com/roofing
Packing unit	500 ml tin
	ARTICLE
	Transparent 81065-205



Accessories adhesives

Applicator trolley for RENOLIT ALKORPLUS glue 81068

Material	Aluminium
Product ranges	RENOLIT ALKORPLAN, ALKORTEC
Application	Applicator for 5 drums of glue for the bonding of fleece-backed membranes
Adhesive range	1 m
Packing unit	Per piece
	ARTICLE
	81069-001



Adhesive spray system

Material	Spray system: pressure vessel + gun + hoses (10 m)
Product ranges	RENOLIT ALKORPLAN, ALKORTEC
Application	Spray system under pressure for dispersing the RENOLIT ALKORPLUS ₈₁₀₄₀ and ₈₁₀₆₄ adhesives on support and roofing membrane
Packing unit	Per piece
	ARTICLE
	Spray system: pressure vessel + gun + hoses (10 m) 81063-001
	Compressor, barrel of 20 l with 2 cylinder engine. 81063-002
	Extension of 70 cm for pistol. 81063-005
	Gun for spray system 81063-006
	Hoses for spray system (10 m) 81063-007

	Hose to connect the pressure vessel to the compressor (40 m) 81063-003
--	---



Spray system with membrane pump

Material	Spray system with membrane pump + extension of 70 cm for pistol + gun + hoses (10 m)
Product ranges	RENOLIT ALKORPLAN, ALKORTEC
Application	Spray system for dispersing the RENOLIT ALKORPLUS ₈₁₀₆₄ adhesive on the support
Packing unit	Per piece
	ARTICLE
	Spray system: membrane pump + trolley + extension of 70 cm for pistol + gun + hoses (10 m) 81063-008



Solvents

Cleaner

Material	Ethyl acetate
Installation temp.	5°C (Flash point: -4°C)
Shelf life	12 months
Product ranges	RENOLIT ALKORPLAN, ALKORTEC
Application	Cleaning of the welding area, removal of stains (bituminous products, adhesive residue,...)
Transport	UN 1173, Ethylacetate MSDS available upon request or on www.renolit.com/roofing
Packing unit	Colour ARTICLE
1 litre tin	Transparent 81044-001
(6 tins/box)	
5 litre tin	Transparent 81044-002



Solvent for solvent welding

Material	Tetrahydrofurane (THF)
Installation	Apply with brush applicator 81345-001
Consumption	25 g/lm
Installation temp.	5°C (Flash point: -21°C)
Shelf life	12 months
Product ranges	RENOLIT ALKORPLAN, ALKORTEC
Application	cold solvent welding
Transport	UN 2056, Tetrahydrofuran MSDS available upon request or on www.renolit.com/roofing
Packing unit	1 litre tin – 6 tins/box
	Colour ARTICLE
	Transparent 81025-001



Accessory for solvent. Can be applied with RENOLIT ALKORPLUS 81145 (bottle) and 81345 (brush applicator): *chapter RENOLIT ALKORPLUS, page 48*

Primer

Fast dry primer

Material	Bituminous primer
Installation	100-300 ml/sqm, depending on the surface. (See technical data sheet for detailed specifications).
Installation temp.	+3 to +27°C (Flash point +35°C)
Shelf life	12 months (0 to +35°C)
Product ranges	RENOLIT ALKORTEC SK, RENOLIT ALKORPLUS
Application	Pre-treatment of the roof surface before the installation of self-adhesive roofing membranes or the self-adhesive vapour control layer RENOLIT ALKORPLUS ₈₁₀₀₂
Transport	UN 1268 Adhesives MSDS available upon request or on www.renolit.com/roofing
Packing unit	25 litre drum – per piece
	Colour ARTICLE
	Black 81141-002



Separation and protection layer


Glass fleece

Material	Glass fleece 120 g/sqm
Thickness	± 1.34 mm
Length	100 m
Width	2 m
Product ranges	RENOLIT ALKORPLAN, ALKORTEC, ALKORTOP
Application	Separation layer, fire resistant protection layer
Packing unit	Per roll - rolls are singly packed in polyethylene film
	Colour ARTICLE
	White 81001-001



Glass fleece tissue

Material	Glass Fleece with polyurethane coating
Fire resistance	A2-s1,d0 (according to the M060848 report of LNE)
Thickness	± 0,35 mm
Length	50 lm
Width	1 m
Weight	± 450 g/m ²
Product range	RENOLIT ALKORPLAN, ALKORTEC, ALKORTOP
Installation	The protection layer is hot air welded to the roofing membrane
Application	Fire MO
Packing unit	Per roll
	Colour ARTICLE
	Grey 84001-001

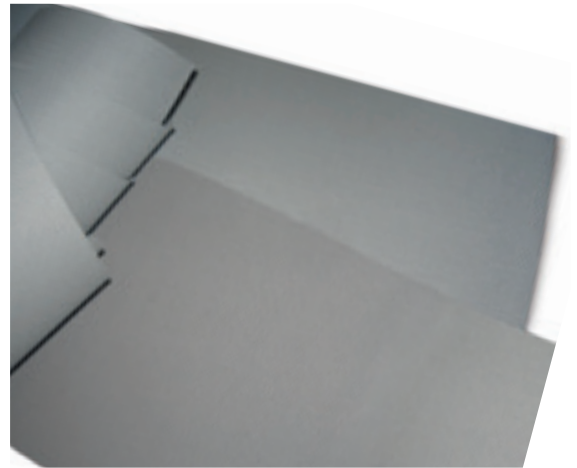

Polyester fleece 300 g

Material	Needlefelt synthetic fleece, 300 g/sqm (short fibre)
Thickness	3.00 - 4.00 mm
Length	75 m
Width	2 m
Weight	45 kg
Product ranges	RENOLIT ALKORPLAN, ALKORTEC, ALKORTOP
Application	Separation layer, protection layer, compression layer
Packing unit	Per roll - rolls are singly packed in polyethylene film
	Colour ARTICLE
	Light green 81005-001



Separation and protection layer


Polyester fleece 180 g

Material	Needlefelt synthetic fleece, 180 g/sqm	
Thickness	2.00 - 2.70 mm	
Length	100 m	
Width	2 m	
Weight	36 kg	
Product ranges	RENOLIT ALKORPLAN, ALKORTEC, ALKORTOP	
Application	Separation layer, protection layer	
Packing unit	Per roll - rolls are singly packed in polyethylene film	
	Colour	ARTICLE
	Light green	81008-001



PVC Protection layer

Material	Fleece-backed RENOLIT ALKORPLUS protection layer (PVC: 0.6 mm/ polyester fleece: 200 g/sqm)	
Thickness	± 1.5 mm	
Length	20 m	
Width	2.05 m	
Weight	40 kg	
Product ranges	RENOLIT ALKORPLAN, ALKORTEC, ALKORTOP	
Application	Protection layer for warm roofs, inverted roofs and green roofs	
Packing unit	1 roll	
	Colour	ARTICLE
	Grey (73321)	35121-003

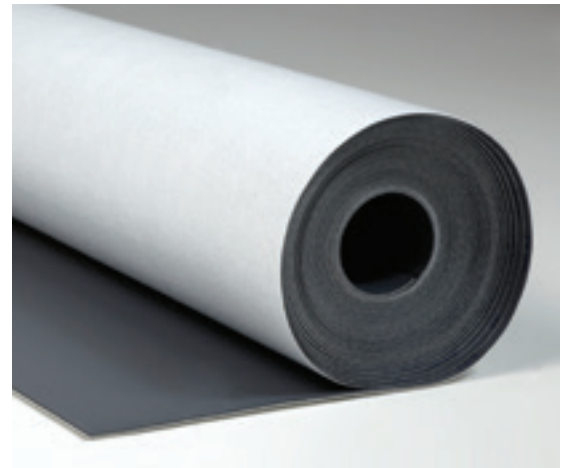

Vapour control layers


Vapour control layer (VCL)

Material	Blown extruded LDPE film			
Fire resistance	Fire resistance E according to EN 13501-1			
Length	25 m			
Vapour transmission rate	$\mu \approx 440.000 - 450.000$			
Colour	Opaque yellow			
Product ranges	RENOLIT ALKORPLAN, ALKORTEC, ALKORTOP *			
Thickness	Weight	Width	Packing unit	ARTICLE
0.25 mm	36 kg/roll	6 m	21 Rolls/pallet **	81010-001
0.40 mm	40 kg/roll	4 m	25 Rolls/pallet ***	81010-002

* For RENOLIT ALKORTOP membranes the use of a 0.40 mm thick VCL is required.

** Supplied folded in 4 - roll of 1.5 m width *** Supplied folded in 2 - roll of 2 m width

Accessory for vapour control layer. The vapour control overlaps can be sealed with double-sided adhesive tape RENOLIT ALKORPLUS 81057, chapter RENOLIT ALKORPLUS: p 47

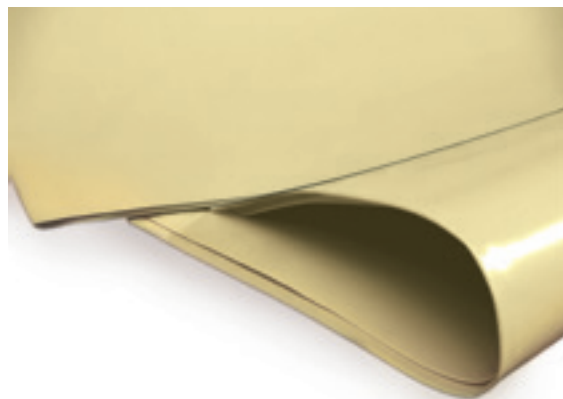

Vapour control layer (VCL)


Material	Blown extruded LDPE film			
Fire resistance	Fire resistance F according to EN 13501-1			
Length	25 m			
Vapour transmission rate	$\mu \approx 500.000 - 560.000$			
Colour	Opaque bleu			
Product ranges	RENOLIT ALKORPLAN, ALKORTEC, ALKORTOP *			
Thickness	Weight	Width	Packing unit	ARTICLE
0.25 mm	36 kg/roll	6 m	21 Rolls/pallet **	81012-001
0.40 mm	40 kg/roll	4 m	20 Rolls/pallet *	81012-002

* For RENOLIT ALKORTOP membranes the use of a 0.40 mm thick VCL is required.

** Supplied folded in 3 - roll of 1.60 m width


*** Supplied folded in 4 - roll of 1.05 m width

Accessory for vapour control layer. The vapour control overlaps can be sealed with double-sided adhesive tape RENOLIT ALKORPLUS 81057, chapter RENOLIT ALKORPLUS: p 47

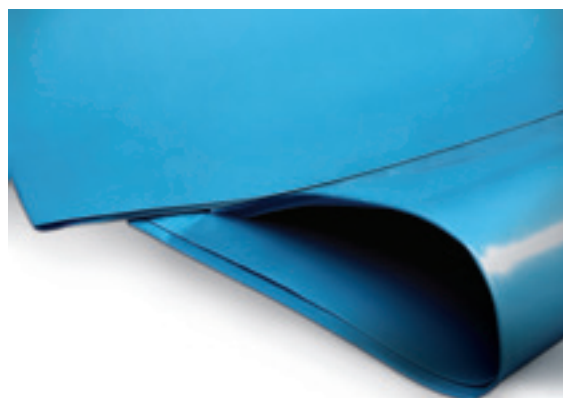

Self-adhesive vapour control layer

Material	Self-adhesive bituminous vapour control layer protected by a reinforced aluminium			
Vapour transmission rate	Sd > 1500 m			
Thickness	0.8 mm			
Length	30 m			
Width	1 m			
Weight	37 kg			
Product ranges	RENOLIT ALKORPLAN, ALKORTEC, ALKORTOP			
Packing unit	Per roll - 25 rolls/pallet			
	Colour			ARTICLE
	Black/alu			81002-002

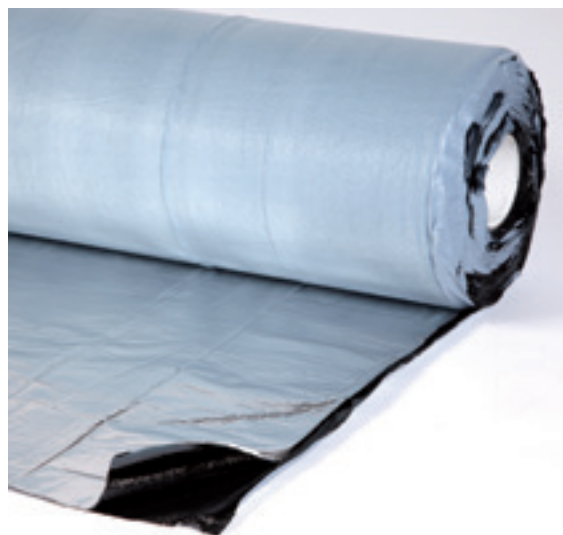

RENOLIT POLIQUID Detail – Liquid waterproofing

RENOLIT POLIQUID Detail


Material	PMMA-resin		
Consumption	Min. 2,5 kg/sqm, minimum thickness 1,7 mm		
Shelf life	12 months		
Curing	30 min rainproof, 3 hours complete curing		
Product ranges	RENOLIT ALKORPLAN, ALKORTEC		
Application	Sealing of roof details, joins		
Packing unit	10 kg drum – per piece		
Transport		UN 1263 Paint	
		MSDS available upon request or on www.renolit.com/roofing	
	Colour	ARTICLE	
	Pebble grey (RAL 7032)	81800-001	
Product	Temperature		
RENOLIT	Air	Surface	Material
POLIQUID Detail	-5°C tot +35°C	+3°C tot +50°C	+3°C tot +30°C

*The surface temperature should be at least 3°C above dew point during application and curing.




Always activate with the RENOLIT POLIQUID catalyst.

RENOLIT POLIQUID Catalyst

Material	Peroxide (powder)		
Shelf life	12 months		
Product ranges	RENOLIT ALKORPLAN, ALKORTEC		
Application	Hardener for 81800-001 (RENOLIT POLIQUID PMMA-resin) and 81802-002 (RENOLIT POLIQUID combi-primer)		
Packing unit	100 g bag – per piece		
Transport		UN3106 Organic peroxide	
		MSDS available upon request or on www.renolit.com/roofing	
		ARTICLE	
		81801-001	



RENOLIT POLIQUID Combi-primer

Material	PMMA based		
Consumption	0.5 kg - 0.8 kg/sqm		
Shelf life	12 months		
Curing	30 min rainproof		
Product ranges	RENOLIT ALKORPLAN, ALKORTEC		
Application	Primer for wood and absorbent substrates		
Packing unit	5 kg drum – per piece		
Transport		UN1263 Paint	
		MSDS available upon request or on www.renolit.com/roofing	
		ARTICLE	
		81802-001	
Product	Temperature		
RENOLIT POLIQUID	Air	Surface	Material
combi-primer	-5°C tot +35°C	+3°C tot +50°C	+3°C tot +30°C

*The surface temperature should be at least 3°C above dew point during application and curing.



Always activate with the RENOLIT POLIQUID catalyst.

RENOLIT POLIQUID Detail – Liquid waterproofing

RENOLIT POLIQUID Fleece

Material	Synthetic PES-fleece, 110 g/sqm	
Roll length	50 m	
Application	Specially designed synthetic PES fleece for the use in combination with RENOLIT POLIQUID Detail.	
Packing unit	Per roll	
	Width	ARTICLE
	26 cm	81803-001
	70 cm	81803-002



RENOLIT POLIQUID ACCESSORIES

Material	Mixing bucket of 5,6 lt with lid	
Packing unit		ARTICLE
	Per piece	81804-001
Material	Paint rollers of 10 cm width	
Packing unit		ARTICLE
	10 units	81804-002
Material	Paint roller handle of 10 cm width	
Packing unit		ARTICLE
	Per piece	81804-003
Material	Tape	
Width	10 cm	
Length	50 m	
Packing unit		ARTICLE
	Per roll	81804-004



RENOLIT ALKORSOLAR Accessories

Aluminium insert

Material	Aluminium EN AW 6060 T6
Length	3 m
Thickness	2 mm
Dimensions	20 mm (W) x 25 mm (H)
Product ranges	RENOLIT ALKORPLAN, ALKORTEC
Packing unit	15 pces/box
	ARTICLE
	81601-004




Multifunctional mounting profile

Material	Aluminium EN AW 6063 T66
Length	6.20 m
Dimensions	46 mm (W) x 54 mm (H)
Product ranges	RENOLIT ALKORPLAN, ALKORTEC
Packing unit	Per piece
	ARTICLE
	81631-005



Connecting piece for multifunctional profile

Material	Aluminium EN AW 6060 T66
Length	300 mm
Dimensions	28 mm (W) x 32 mm (H)
Product ranges	RENOLIT ALKORPLAN, ALKORTEC
Application	Connecting piece for multifunctional profiles RENOLIT ALKORPLUS ₈₁₆₃₁
Packing unit	50 pces/box
	ARTICLE
	81634-005



Clamp for multifunctional profile

Material	Aluminium EN AW 6060 T66
Length	50 mm x 30 mm x 5 mm
Product ranges	RENOLIT ALKORPLAN, ALKORTEC
Application	Connecting piece for multifunctional profiles RENOLIT ALKORPLUS ₈₁₆₃₁
Packing unit	100 pces
	ARTICLE
	81632-003



RENOLIT ALKORSOLAR Accessories

Self tapping screw

Material	Stainless steel A2 SW8
Length	25 mm
Diameter	6 mm
Product ranges	RENOLIT ALKORPLAN, ALKORTEC
Packing unit	500 pcs/box
	ARTICLE
	81602-005

Conversion Kit for welding ALKORSOLAR profiles

Packing unit	1 set/box
	ARTICLE
	81078-010



RENOLIT ALKORGREEN Accessories


Slip Layer

Material	3-layer vapour permeable membrane, 2 x spun-bonded PP	
Length	50 m	
Width	1.50 m	
Weight	120 g/sqm - 13.5 kg/roll	
Application	Offers extra protection for underlying layers of the RENOLIT ALKORGREEN system	
Packing unit	Per roll	
	Colour	ARTICLE
	Grey/White	81014-001



Drainage and filter layer

Material	Synthetic corrugated sheet with polypropylene filter layer attached to the upper side	
Length	20 m	
Width	Corrugated sheet : 2 m - Filter layer: 2.2 m	
Weight	0.720 kg/sqm - 28.80 kg/roll	
Application	To filter and remove excess water	
Packing unit	Per roll	
		ARTICLE
		81015-002

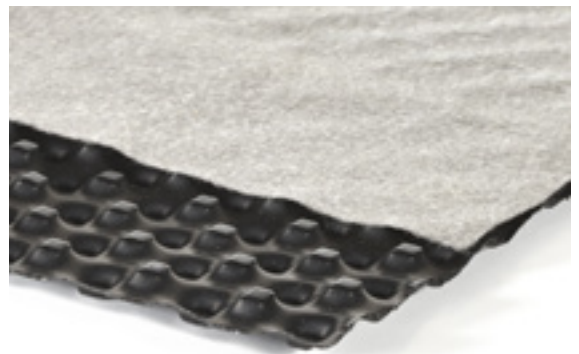

Water retention layer

Material	Mineral wool (water absorption capacity: ± 19 l/sqm)	
Length	9 m	
Width	1 m	
Thickness	25 mm	
Weight	15,75 kg/roll	
Application	Guarantees a water stock for the plants of the RENOLIT ALKORGREEN system	
Packing unit	Per roll	
		ARTICLE
		81016-001



Substrate

Material	Mineral/organic substrate for extensive green roofs	
Volume when delivered	0.95 t/m ³	
Packing unit		ARTICLE
Bag (25 kg)	On order	81017-001
Bulk bag (1000 kg)	On order	81017-002



General Accessories


Double-sided adhesive tape

Material	Double-sided butyl tape with a peelable liner
Length	25 m
Width	15 mm
Weight	0.100 kg
Application	Vapour and waterproof sealing of vapour control overlaps
Packing unit	16 pces/box
	ARTICLE
	81057-003



Compressive foam tape

Material	Compressive tape
Installation temp.	5°C
Length	5 m
Width	15 mm
Weight	0.04 kg
Application	Windtight sealing of roof edge profiles
Packing unit	20 pces/box
	ARTICLE
	81058-001

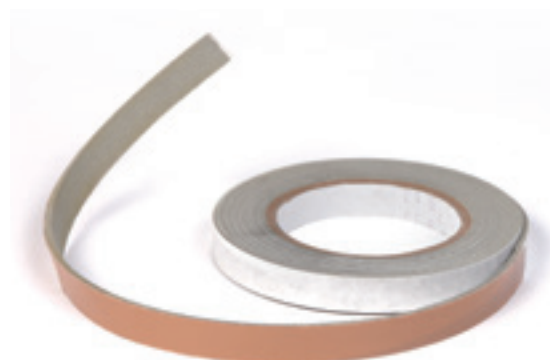

Peel stop bar

Material	Galvanised steel
Length	2.25 m
Thickness	5 mm
Application	Linear fixation of roofing membranes
Packing unit	10 pces
	ARTICLE
	81103-001



General accessories

Application of seam sealer

Material	Bottle with nozzle	
	Packing unit	ARTICLE
	10 pces	81145-001
Material	Applicator	
	Packing unit	ARTICLE
	50 pces	81245-001
Material	Brush applicator	
	Packing unit	ARTICLE
	Per piece	81345-001
Material	PE kit	
	Packing unit	ARTICLE
	Kit: 5 bottles + 20 nozzles	81445-001



Silicone roller

Material	Silicone	
Width	40 mm	
Packing unit	Per piece	
		ARTICLE
		81072-004



Brass corner roller

Material	Brass	
Width	6 mm	
Application	Tool to weld awkward details	
Packing unit	Per piece	
		ARTICLE
		81072-005



Weld testing probe


Material	Weld testing probe	
Application	Tool to check the welded seams	
Packing unit	Per piece	
		ARTICLE
		81072-019



Universal leaf guard

Material	PE leaf guard	
Diameter	Universal (80 mm - 125 mm)	
Packing unit	50 pces/box	
	Colour	ARTICLE
	Black	81088-039



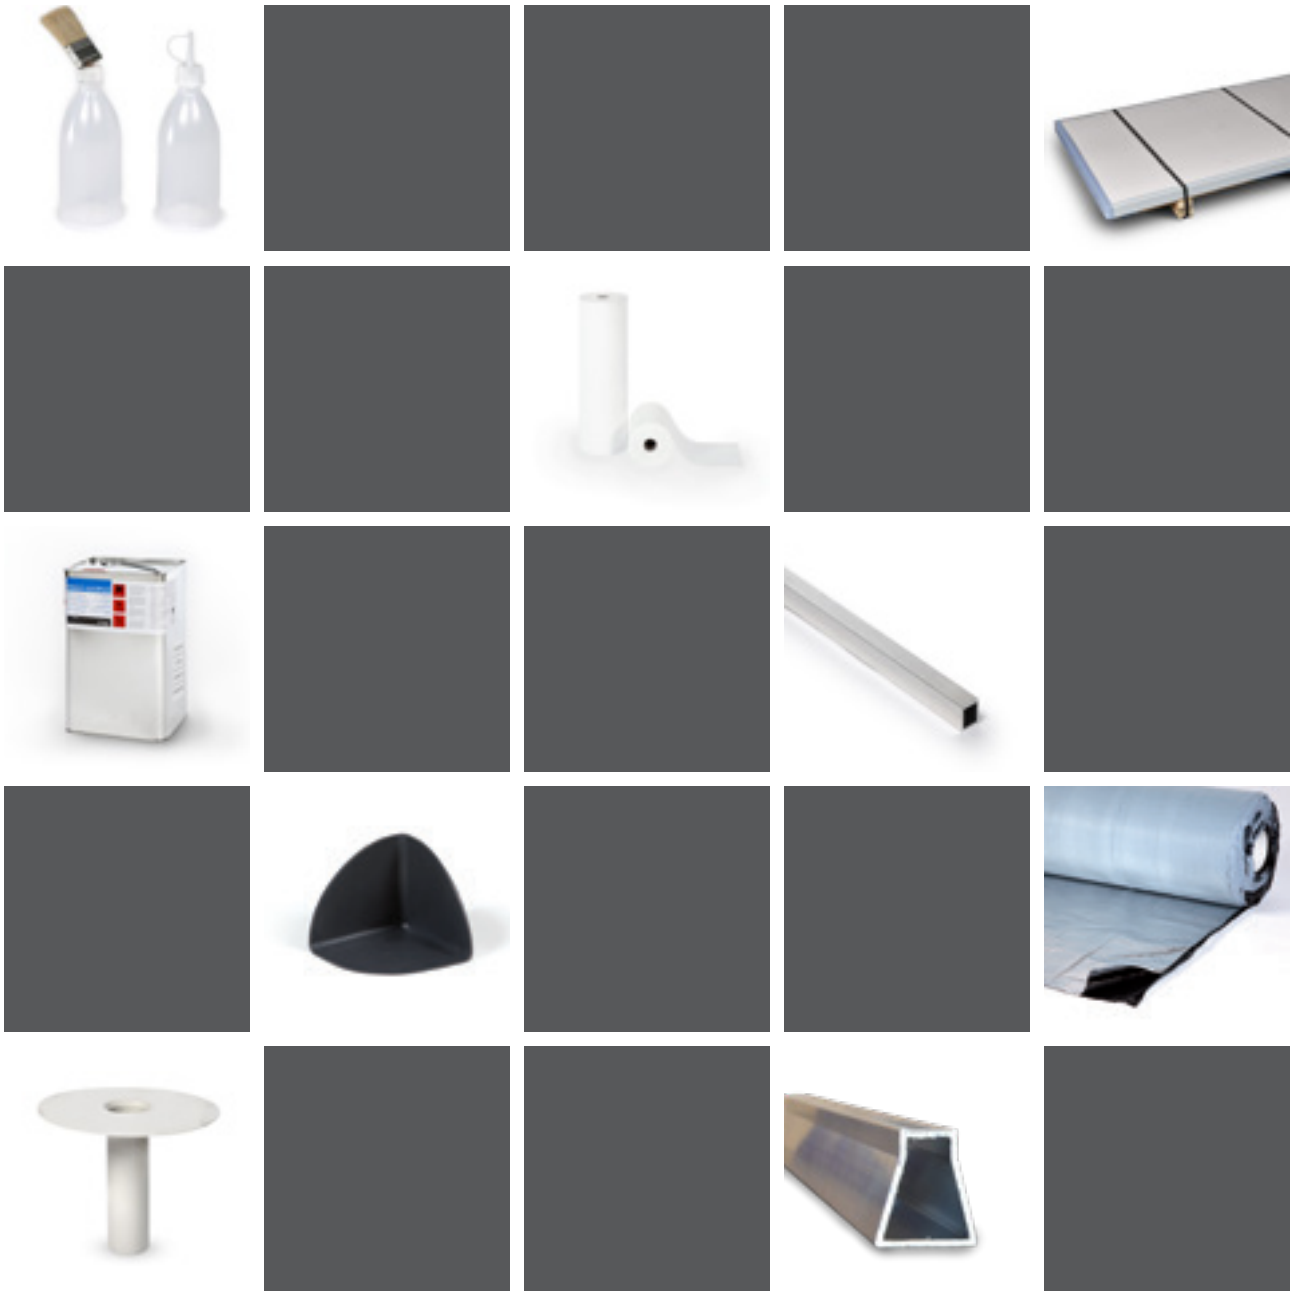

www.renolit.com/roofing

RENOLIT Belgium N.V. - Export Dpt. - Industriepark De Bruwaan 43 - 9700 Oudenaarde - Belgium
 T +32 (0)55 33 98 51 - F +32 (0)55 31 86 58 - renolit.belgium@renolit.com

The information contained in the present commercial literature has been given in good faith and with the intention of providing information. It is based on current knowledge at the time of issue, and may be subject to change without notice. Nothing contained herein may induce the application of our products without observing existing patents, certificates, legal regulations, national or local rules, technical approvals or technical specifications or the rules and practices of good workmanship for this profession. The purchaser should verify whether import, advertising, packaging, labelling, composition, possession, ownership and the use of our products or the commercialisation of them are subject to specific territorial rules. He is also the sole person responsible for informing and advising the final end user. When faced with specific cases or application details not dealt with in the present guidelines, it is important to contact our technical services, who will give advice, based on the information at hand and within the limitations of their field of expertise. Our technical services cannot be held responsible for the conception of, nor the execution of the works. In the case of negligence of rules, regulations and duties on the part of the purchaser we will disclaim all responsibility.



Rely on it.