




Rely on it.

RENOLIT ALKORPLAN₈₁₁₁₄
Walkway and protection layer

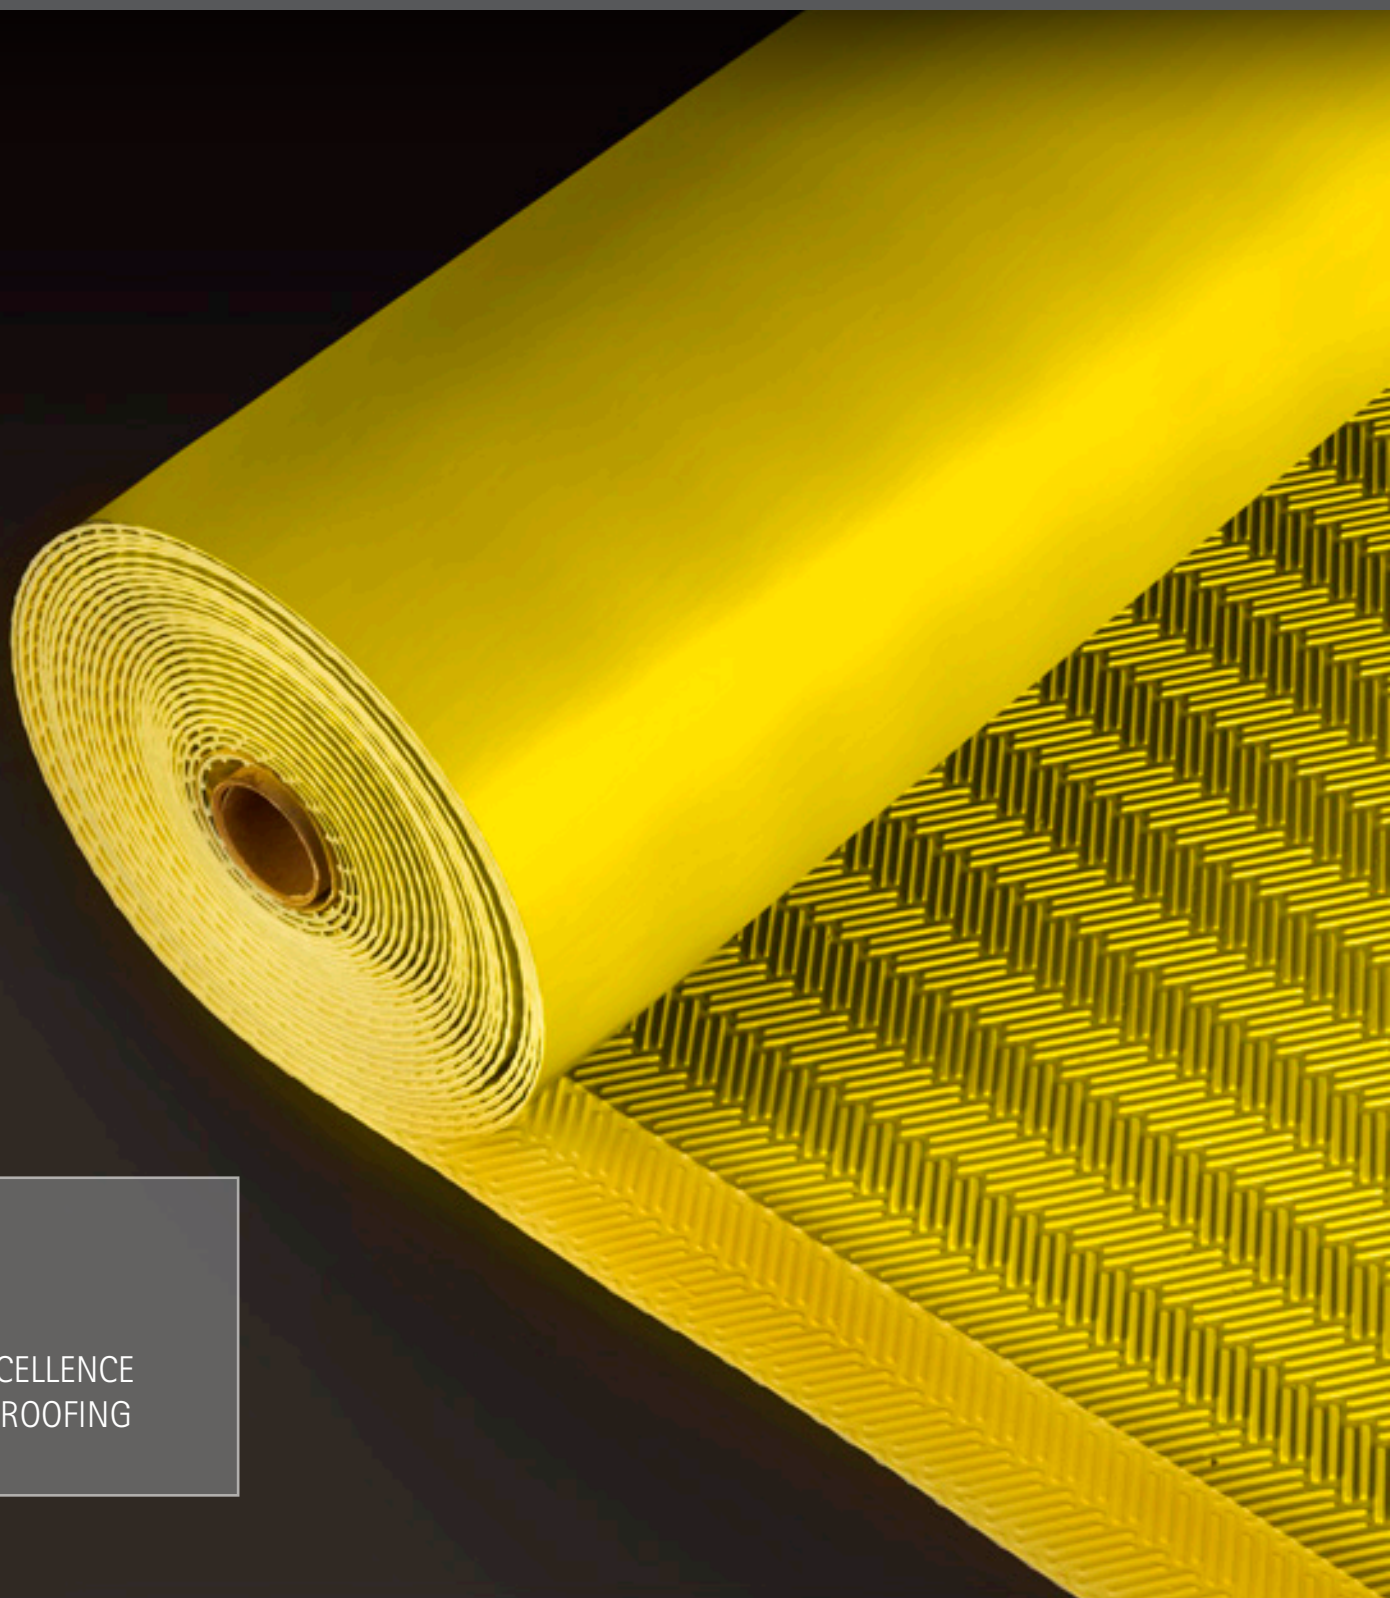

EXCELLENCE
IN ROOFING

RENOLIT ALKORPLAN⁸¹¹¹⁴

Walkway and protection layer

PRODUCT DESCRIPTION

The RENOLIT ALKORPLAN⁸¹¹¹⁴ is an unreinforced membrane, compatible with the RENOLIT ALKORPLAN roofing membranes.

ADVANTAGES

- Clear indication of the walkways on a roof.
- Non-slip embossing, tested according to British and German standards for safe access to roof areas.
- Simple and quick installation: the walkway is supplied on 15 m rolls and can be welded onto the roof area by means of hot air welding.
- Double application: walkway and protection layer. In addition to the safety aspect, the 4 mm thick walkway also provides an extra protection for the underlying roofing membrane.

PRODUCT DATA

- Product name: 81114-002
- Thickness: 4 mm
- Width: 76 cm
- Length: 15 m
- Weight: 42 kg/roll
- Colour: Zinc yellow (RAL 1018)
- Fire resistance: Class E according to EN 13501-1
- Non-slip embossing: Class LOW according to BS7976-2, Class R10 according to DIN 51130
- Installation: According to the RENOLIT ALKORPLAN installation instructions

APPLICATION

- Before the walkway membrane is installed, the roof deck has to be free of irregularities, water, frost, ice and sharp and rough materials such as screws, metal off-cuts, etc.
- Unroll the walkway membrane and cut the membrane to the desired length. Be aware that only maximum lengths of 3 m are allowed. In case of larger lengths, a joint of minimum 2 cm must be provided for better rainwater drainage.
- Install the walkway membrane with a continuous weld around the perimeter (min 3 cm weld).



WWW.RENOLIT.COM/ROOFING

RENOLIT Cramlington Ltd, Station Road - Cramlington, Northumberland NE23 8AQ - United Kingdom
T +44 1670 718283 - F +44 1670 590096 - renolit.cramlington@renolit.com

RENOLIT Belgium N.V. - Export Dpt. - Industriepark De Bruwaan 43 - 9700 Oudenaarde - Belgium
T +32 (0)55 33 98 51 - F +32 (0)55 31 86 58 - renolit.belgium@renolit.com



Rely on it.